



SWJ SERIES SHALLOW WELL JET PUMPS



Recommended for Pumping Clear Water

QUALITY FEATURES

HIGH PRESSURE STATE-OF-THE-ART PUMP
MECHANICAL SEAL

SQUARE "D" PRESSURE SWITCH

HIGH-STRENGTH MOLDED IMPELLER,
DIFFUSER, BUILT-IN VENTURI & NOZZLE

SQUARE FLANGE MOTOR U/L & CSA APPROVED,

OPEN DRIP PROOF W/CAPACITOR START &
THERMAL PROTECTION FOR SAFETY


SERVICING ACCESSIBILITY

O-RING GASKETS FOR POSITIVE SEAL & EASE OF SERVICE

SIMPLY REMOVE MOTOR WITHOUT DISTURBING PLUMBING
TO REPLACE IMPELLER, SEAL OR GASKET

Specifications subject to change without notice.

SWJ SERIES PERFORMANCE CURVES SHALLOW WELL JET PUMPS

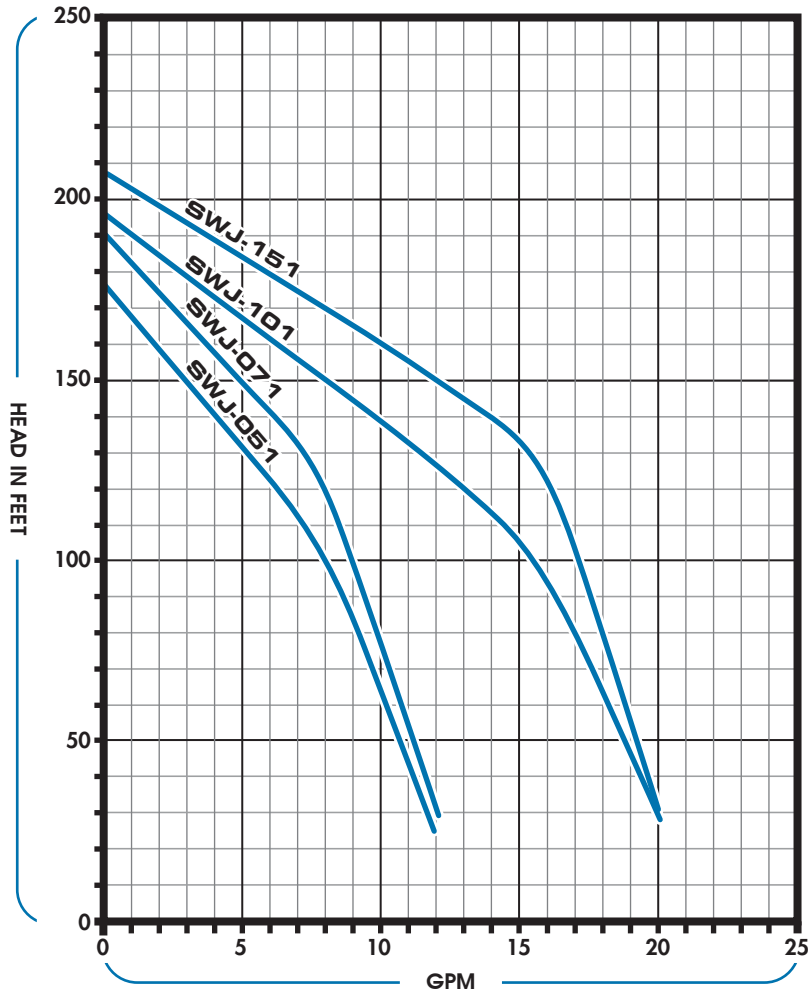

MODEL	HP	VOLTS	SUCTION FT.	Discharge Pressure				SHUT OFF PSI
				20 PSI	30 PSI	40 PSI	50 PSI	
				Gallons per Hour				
SWJ-051	1/2	115/230	5	720	666	500	300	65
			15	546	530	478	260	60
			25	294	289	275	150	56
SWJ-071	3/4	115/230	5	822	822	766	520	70
			15	630	630	594	410	65
			25	395	395	390	270	58
SWJ-101	1	115/230	5	990	960	930	550	72
			15	750	725	677	485	68
			25	396	386	369	275	63
SWJ-151	1 1/2	115/230	5	1170	1050	960	810	88
			15	930	720	450	150	56
			25	330	90	0	0	32

DISTRIBUTED BY: